

HDMI A male - HDMI A male/HDMI D (Micro-HDMI) male - Active optical - Fixed and detachable connector

Highlights:


- Resolutions up to ultra HD 4K 2160p (4096 x 2160) 4:4:4 at 60 Hz
- Flexible outer jacket
- HDMI 2.0 compliant
- Fiber optic technology
- Exchangeable connectors
- Multi-purpose connections (HDMI and micro-HDMI [Display side])
- HDMI ARC up to 50 meter

Product information:

The CLV215A is an active optical HDMI 2.0 cable aimed for fixed installations. It is able to transmit resolutions up to ultra HD 4K 2160p (4096 x 2160) at 60 Hz with a bandwidth of 18Gbps via OM3 fiber optical fiber technology, eliminating the possibility of electronic interference. The fixed and detachable HDMI connector enables you to easily detach and reattach this connector. This way the cable can be fitted through holes and straight tubes with diameters as small as 25 mm.

The CLV215A comes with a USB A to USB Micro B cable included, which is an accessory only required when the HDMI port on the transmitter side is delivering insufficient voltage (typically required when < 4.8 V) for powering the receiver end. The power is transferred from transmitter end to receiver end over the CLV215A cable.

Most general HDMI sources deliver sufficient voltage making the additional cable unnecessary. However typical applications where it might be required are e.g. streaming media player boxes, which might deliver insufficient voltage over their HDMI output.

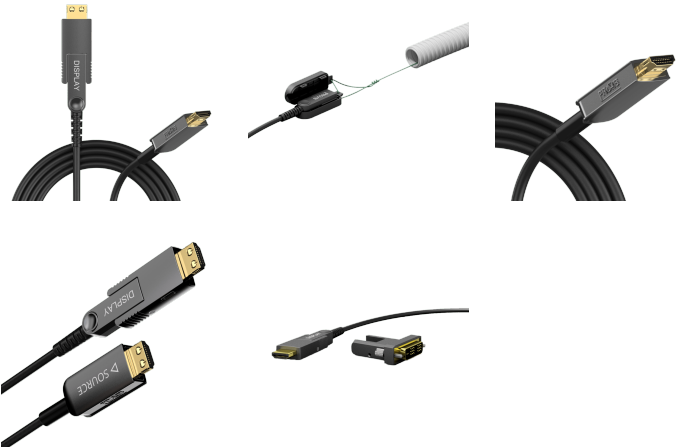

Certification:



Properties:



Product Features:

Series		Classic Series
Application		AV & IT
Accessories	Included	COP110
		Screwdriver
		Pulling capsule case
		USB power cord (Optional use on RX side)
	Optional	COP140

Physical Characteristics:

Outer jacket	Colours	Black	
Inner conductor	Insulation	Material	PE 0.9 mm (Ø)
			PE 1 mm (Ø)
	Shielding	Aluminium foil	Al-mylar, 100% coverage - 25% Overlap
		Drain wire	TC 11 x 0.08 mm (Ø) (OFC)
Overall shielding	Aluminium foil	Al-mylar, 100% coverage - 25% Overlap	
Outer jacket	Material	LSHF 4.5 mm (Ø)	
Strength test	Bending radius	20 mm	
	Tensile strength test	25 kg	
	Connector bending test	> 10000 cycles	
	Connector pull out force	2 kg	
Inner conductor	Material	TC 11 x 0.08 mm (Ø) (OFC)	
		TC 19 x 0.08 mm (Ø) (OFC)	
		TC 30 x 0.08 mm (Ø) (OFC)	
		TC 41 x 0.08 mm (Ø) (OFC)	
		50/125 OM3 / Fiber (4x)	
Section	0.05 mm ²		
	0.08 mm ²		
	0.14 mm ²		
	0.25 mm ²		
	Number of conductors	12	
	Conductor twisting	Yes	

Mechanical Characteristics:

Temperature range Fixed installation - 0 °C till + 75 °C

Variants:

- CLV215A/10 - 10 meter
- CLV215A/15 - 15 meter
- CLV215A/20 - 20 meter
- CLV215A/30 - 30 meter
- CLV215A/40 - 40 meter