


Highlights:

- In depth adjustable
- Stores up to 18 units of 19" Equipment
- Punched square holes for use with snap-in cage nuts
- 2 mm thick cold rolled steel frame
- Easy assembly in 10 minutes
- Floor standing & wall mounted use
- Unrestricted air flow due to open-frame design
- Stand alone & in-furniture integration
- Ships as flat-down package

The OPR318A is an in depth adjustable professional and solid constructed open frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards which is suitable for wall mounted or floor standing installation. It ensures maximum installation, connectivity and maintenance ease storing up to 18 units of 19" equipment.

The open frame rack has an adjustable depth of 300 to 450 mm for easy installation and fitment in existing furniture. The rugged construction made of 2 mm thick steel allows pre-loading of the equipment before transportation to the installation site. Finishing is done in a black (RAL9004) powder coating with fine structure while punched equipment mounting profiles on front and both sides offer a multifunctional use of the cabinet. Delivered in a flat-down package, the simple structure allows assembly by a single person in a record-breaking time.

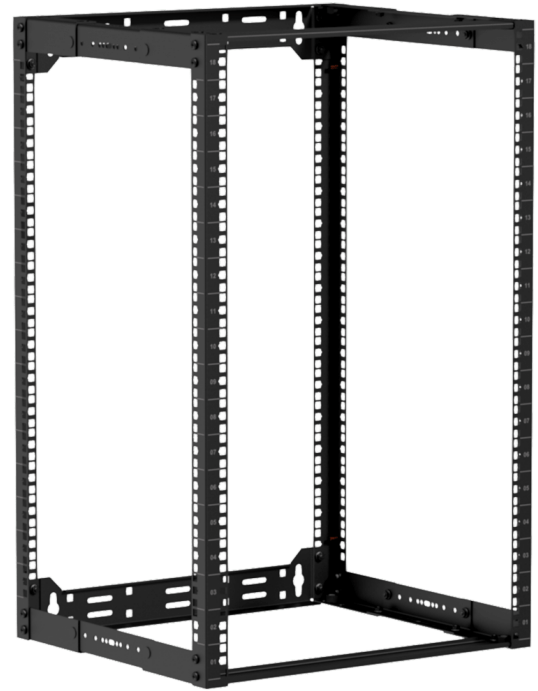

Product Features:

Unit height	18 HE								
Max. usable depth	300 ~ 450 mm								
Max. load standing	100 kg								
Max. load hanging	50 kg								
Dimensions	520 x 825 x 300~450 mm (W x H x D) (excl. rubber feet)								
Colours	Black (RAL9004)								
Weight	10 kg								
Accessories	<table border="0"> <tr> <td>Included</td> <td>4 x Levelling feet</td> </tr> <tr> <td></td> <td>4 x M8 expanding wall bolt</td> </tr> <tr> <td></td> <td>36 x Cage nuts + screws</td> </tr> <tr> <td>Optional</td> <td>KM600 - M6 Cage nuts</td> </tr> </table>	Included	4 x Levelling feet		4 x M8 expanding wall bolt		36 x Cage nuts + screws	Optional	KM600 - M6 Cage nuts
Included	4 x Levelling feet								
	4 x M8 expanding wall bolt								
	36 x Cage nuts + screws								
Optional	KM600 - M6 Cage nuts								

Variants:





- OPR318A/B - Black


Architects' and Engineers' Specifications:

The rack shall be a 19" open frame rack type suitable for wall mounted and floor standing use which complies to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards with 18 usable rack spaces. It shall have the following dimensions: height 825 mm, width 520 mm and an adjustable depth ranging from 300 mm to 450 mm, the weight shall not exceed 9 kg.

The frame of the rack shall be constructed out of cold rolled steel with a thickness of 2 mm, while punched square holes for use with snap-in cage nuts shall be provided for fixation of the equipment. The finishing shall be done in a textured black powder coating (RAL9004) and have printed measurement indications.

The rack shall ship unassembled as a flat-down package and provide a static load capacity of 100 kg and a hanging load capacity of 50 kg. Fixation points for wall mounted use including expanding wall bolts and leveling feet for floor standing use shall be included.

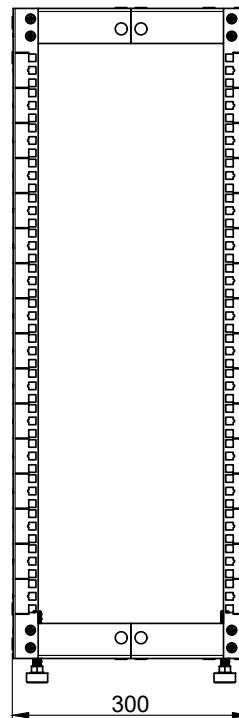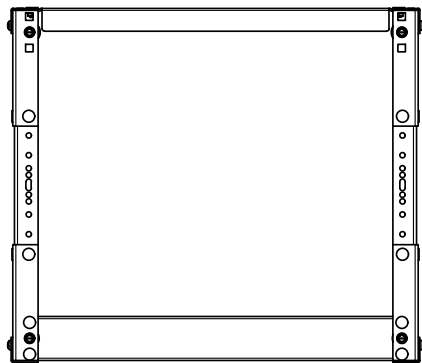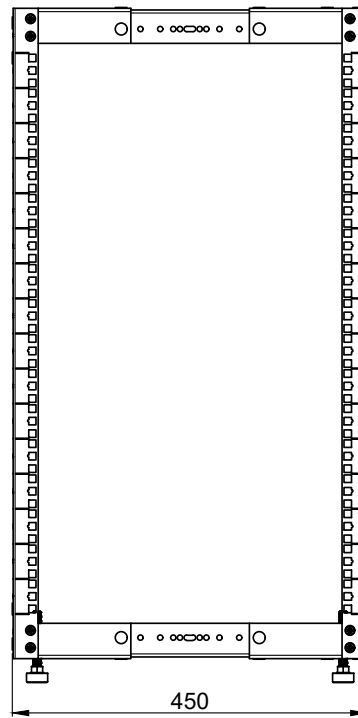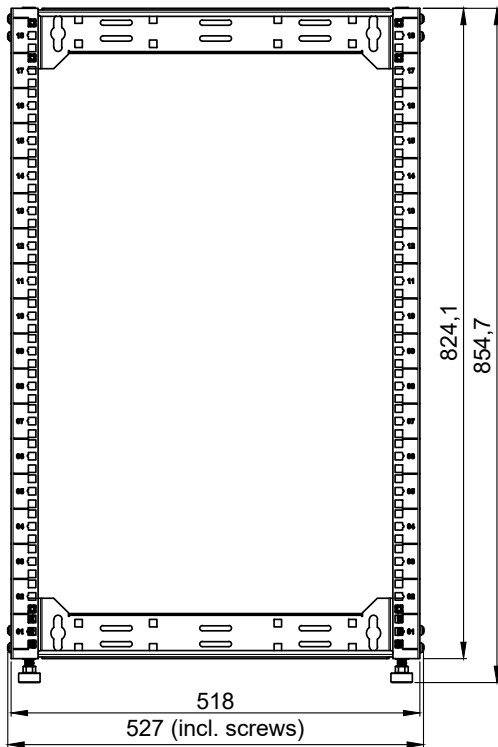

	OPR318A	Product description: 19" OPEN FRAME RACK - 18 UNIT - 300-450MM	
	Weight: TBA	Outer dimensions: (w x h x d) 527 x 854,7 x 450	Unit height: 18 HE