

Highlights:

- Stores up to 6 units of 19" Equipment
- Integrated ventilation grid on top
- Removable sides for easy installing & cabling
- Removable rear panel
- Punched square holes for use with snap-in cage nuts
- Front in depth adjustable 19" profiles (max 560 mm)
- Loading capacity of 60 kg
- Cable entry on top, back & bottom (closable)
- Tempered glass door with keylock
- Keylock with butterfly handle

The WPR606 is a professional 19" wall mount metal rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. It is a solid construction with a cold-rolled steel 1,5 mm thick frame and 1,2 mm thick plates. The WPR606 comes fully assembled and can easily be mounted on the wall. The 19" mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure easy fitting of the equipment.

The tempered smokey grey glass door is fitted with a key lock to keep the equipment only accessible for authorized persons. The removable sides and back panel allow easy installing and cabling of the equipment while the in depth adjustable 19" profiles provide great flexibility for installing equipment depending on its depth.



Product Features:


| | | |
|-------------------|----------|---------------------------------------|
| Dimensions | | 600 x 368 x 600 mm (W x H x D) |
| Unit height | | 6 HE |
| Weight | | 21.69 kg |
| Colours | | Black (RAL9004) |
| Max. load | | 60 kg |
| Max. usable depth | | 560 mm |
| Accessories | Included | 10 x Cage nuts + screws |
| | | 2 x key for front door |
| | | 4 x Key for sidepanel lock |
| | | 1 x Allen key |
| | | 1 x WPR60LR |
| | Optional | KM600 - M6 Cage nuts |
| | | KS600 - M6 x 16 mm bolt DIN7985 Black |
| | | WPR10RF - Roof fan 120x120 mm |
| | | SPR10DC - Dust cover brush |
| | | WPR60FS - Fixed shelf |
| | | WPR60LR - L-Rail pair |
| | | SS160 - Sliding shelf |

Variants:

- WPR606R/B - Black version

Architects' and Engineers' Specifications:

The rack shall have the following dimensions: height 368 mm, depth 600 mm, width 600 mm, have a weight of 20,4 kg and hold up to 6 units. The rack shall comply with ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. The wall panel shall be separable from the rack which allows preloading of the rack and mounting of the panel without the rack attached. The frame of the rack shall be constructed out of cold rolled steel of 1,5 mm thick while for the other parts a thickness of 1,2 mm shall be used . These parts shall have a textured black powder coating (RAL9004) color. The mounting rail shall be adjustable in depth and have printed unit measurement indicators. Rack shall include tempered smokey grey glass door on the front equipped with standard key-lock. Sides and back of the rack shall be removable and the top shall have a ventilation grid.

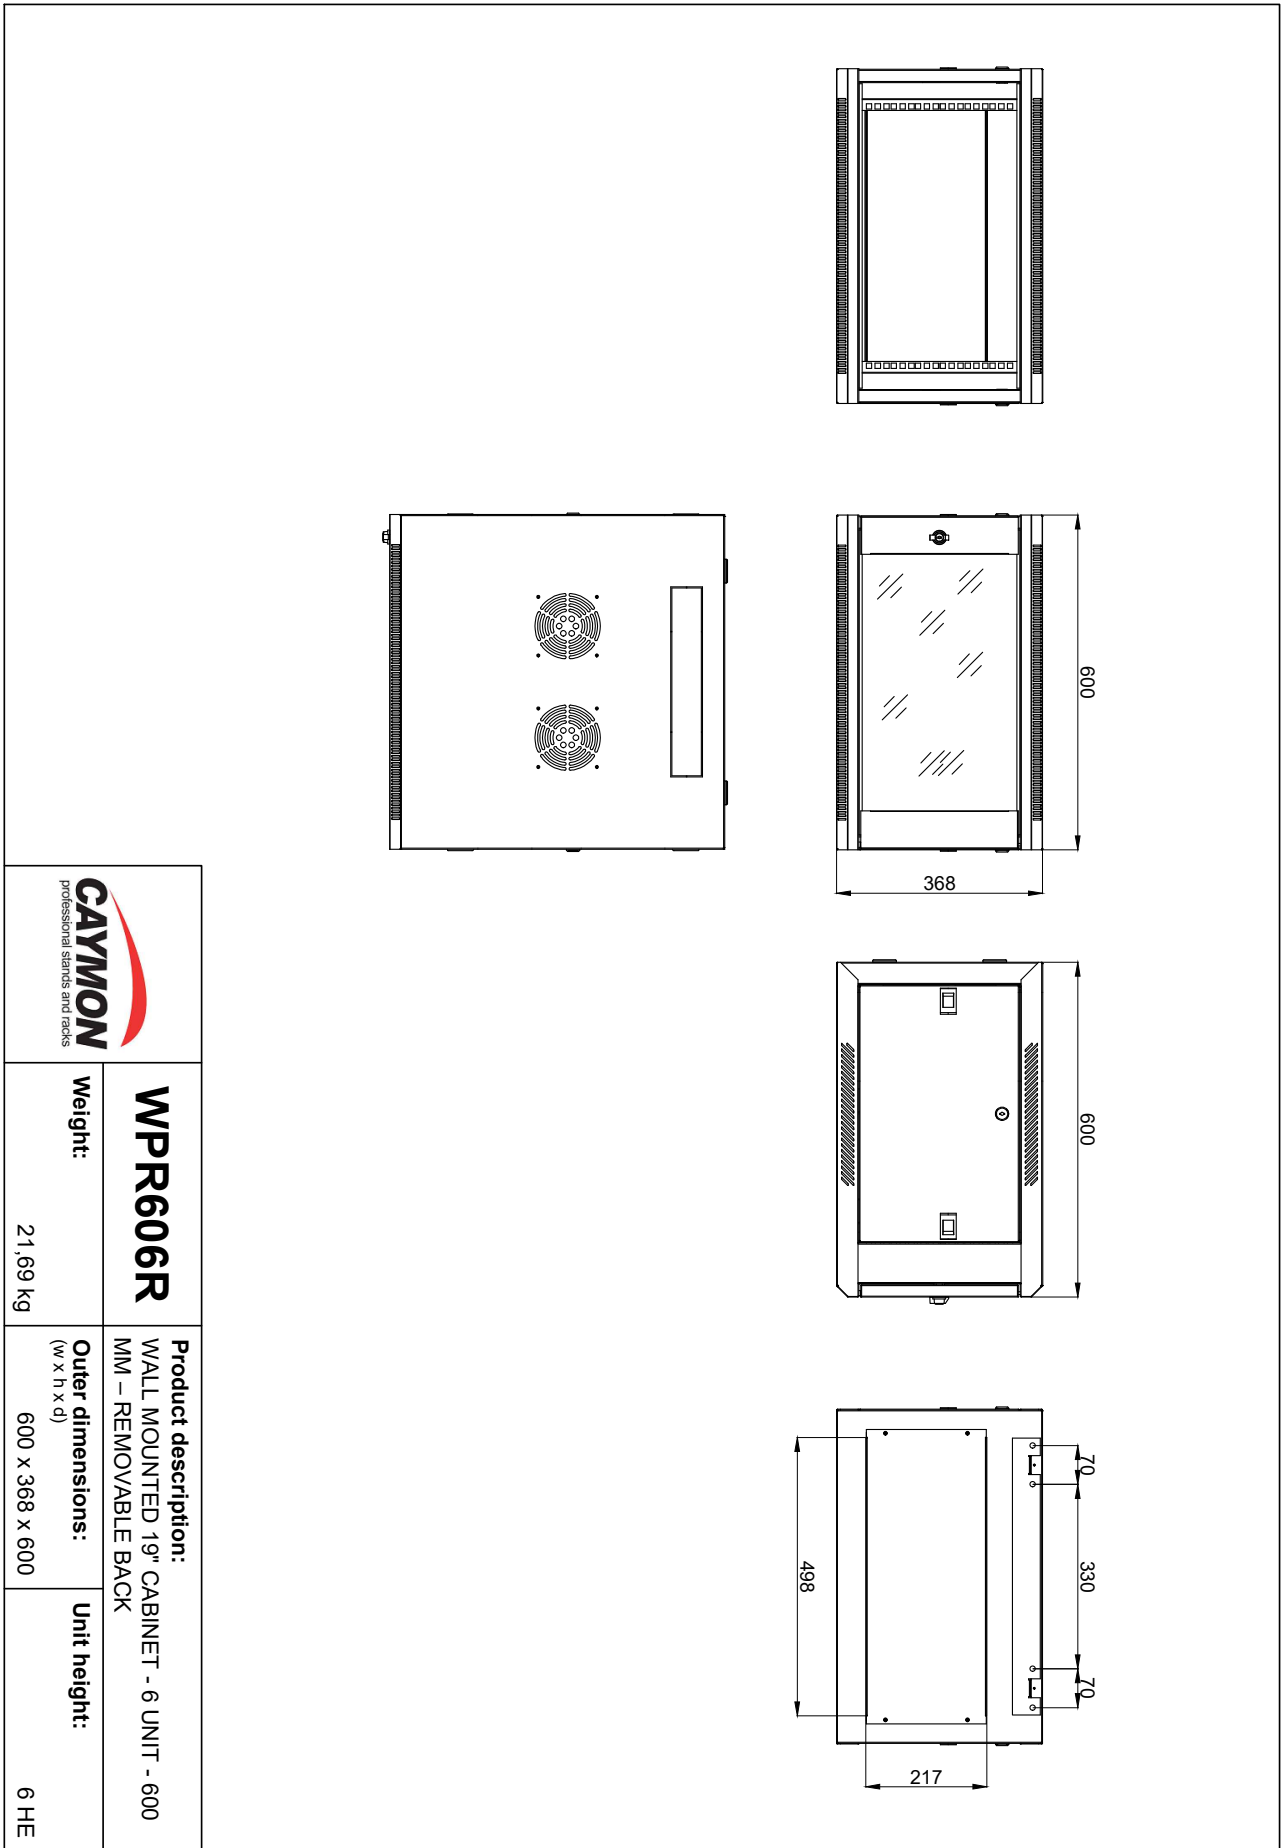

WPR606R

Weight:

21,69 kg

Product description:

WALL MOUNTED 19" CABINET - 6 UNIT - 600 MM - REMOVABLE BACK

Outer dimensions:
(w x h x d)

600 x 368 x 600

Unit height:

6 HE